


CDUM130L

DUAL FREQUENCY UHF & MIFARE HYBRID CARD

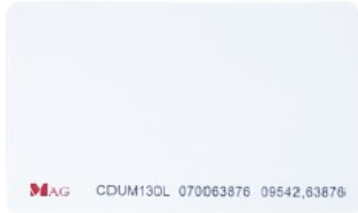


CDUM130L is a dual-frequency card. UHF and Mifare (13.56Mhz) same card number. 0.84mm thickness. Printed wiegand number on card. Program card to the system is more easy with a printed number. It can be used for AR300U UHF mid-range reader or other UHF readers.

Specification

Frequency	UHF 919 - 923MHz and Mifare 13.56Mhz
Printed Number	UHF Wiegand 26/34 , Mifare Wiegand 26/34
Dimension	85 x 55 x 0.84 mm
Weight	6g
Printing On Card	Yes
Color	White
Material	PET
Operaton Temperature	-20 ~ +70°C
Storage Temperature	-40 ~ +85°C
Reading Distance	UHF : 200 - 700 cm ; Mifare: 2-8 cm

Dimension

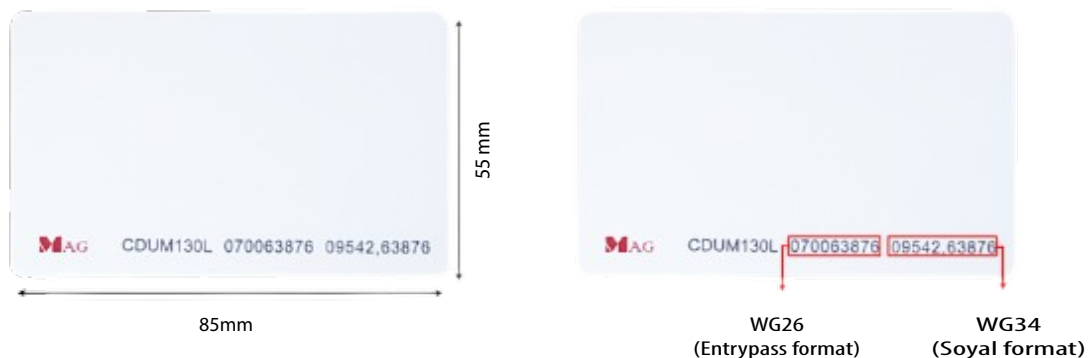

CDUM130L UHF and MIFARE is using the same number as printed on the card. Meaning that you only need to enroll 1 number into the access control system and it will work for both UHF and Mifare readers. This saves you a lot of time. Only 1 card number for each user will appear in the access event report. This makes it easier to review the access control event report.

