




DC SERVO BARRIER GATE

**ACCESSORIES
AND SPARE PART**


DC SERVO BARRIER GATE

BG-DC3

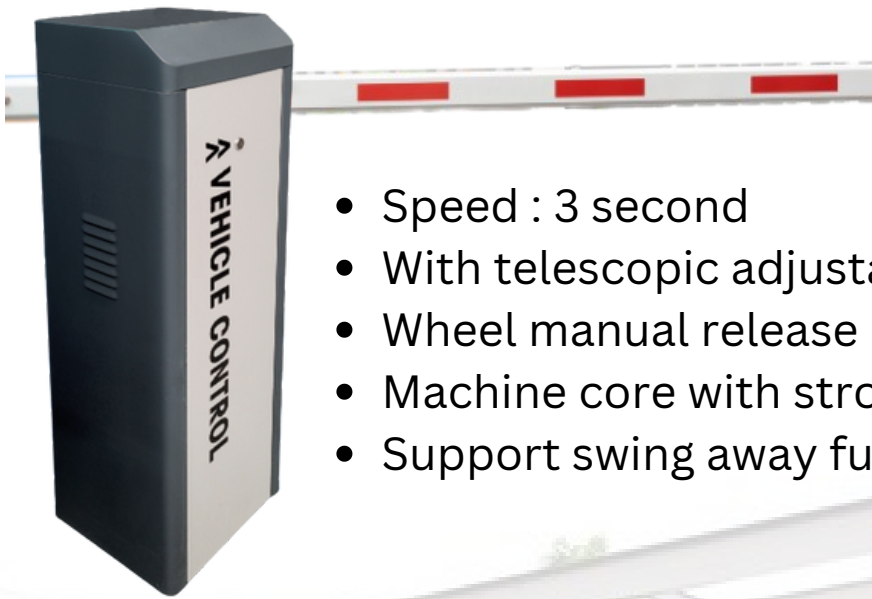

- Speed : 3 second
- With telescopic adjustable arm 4.5 meters
- Wheel manual release
- Machine core with strong and with double spring
- Support swing away function

BG-DC6

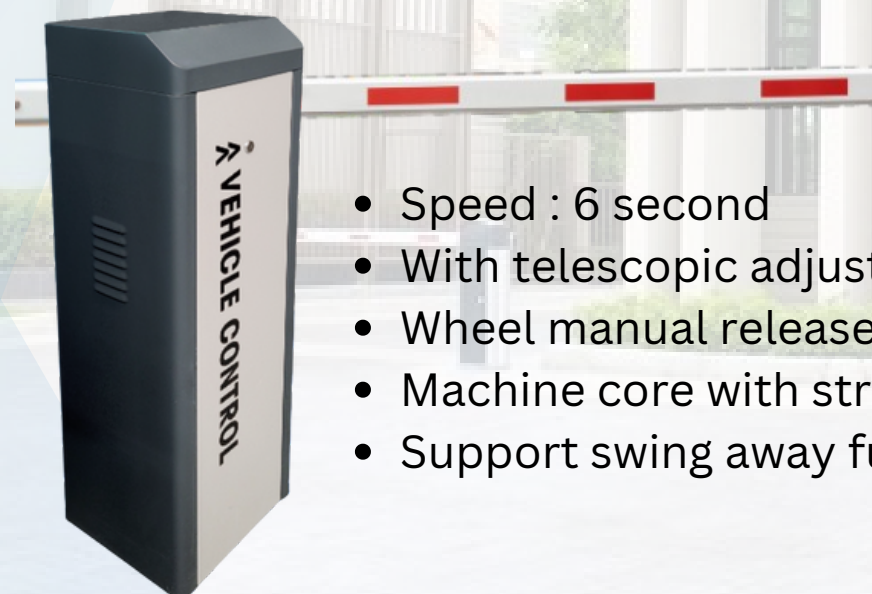

- Speed : 6 second
- With telescopic adjustable arm 6 meters
- Wheel manual release
- Machine core with strong and with double spring
- Support swing away function

DC SERVO MACHINE CORE

BG-DC3





- Speed : 3 second
- With telescopic adjustable arm 4.5 meters
- Wheel manual release
- Machine core with strong and with double spring
- Support swing away function

BG-DC6




- Speed : 6 second
- With telescopic adjustable arm 6 meters
- Wheel manual release
- Machine core with strong and with double spring
- Support swing away function

BG-DC_ARM

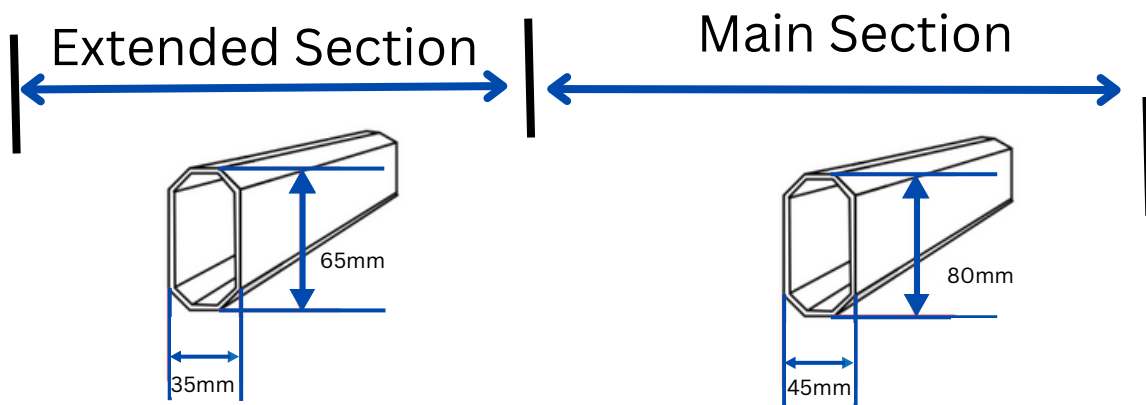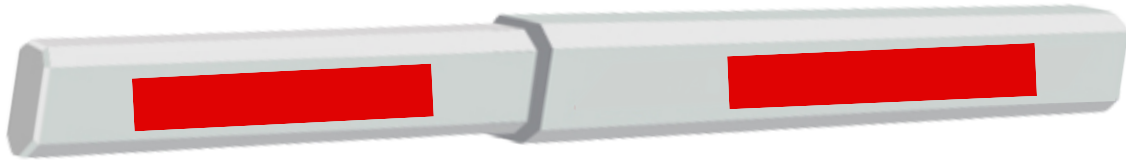


Description	Parameters
Housing Material	Aluminium Alloy
Dimension	Main Section : 45 (W) x 80(H) mm
	Extended Section : 35 (W) x 65(H) mm
Length	4.5m and 6m
Weight	7 kg

ACCESSORIES

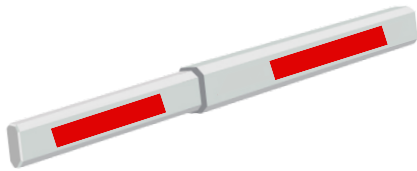

BGDC3_ARM

**4.5 METER SWING AWAY
TELESCOPIC ARM**

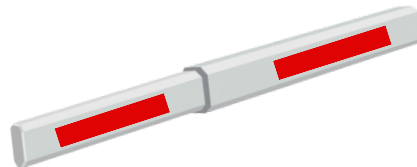

BGDC6_ARM

**6 METER SWING AWAY
TELESCOPIC ARM**



BG-FL (SMALL)

**2 METER PER STRIP FOAM
LINING FOR BARRIER ARM**



BR_SIGNBOAR

SIGNBOARD

- STOP (RED)
- VISITOR (BLUE)
- RESIDENT (GREEN)



BR_PB2

**DOUBLE PUSH BUTTON
WITH BOX
(START & STOP)**



BR_PB3

**TRIPLE PUSH BUTTON
WITH BOX**



TL100

**TWO WAY TRAFFIC
LIGHT**

**RED & GREEN LIGHT
(AC220)**

ACCESSORIES




BG-DC_CTRL

**CONTROLLER BOARD
FOR BG-DC3 / BG-DC6**



C240AC

**LPS AC230 SURGE
PROTECTOR**



MD-4CCU

**12VDC WITH RS485
(DATA / SIGNAL)**



LD01

**SINGLE CHANNEL
LOOP DETECTOR
(AC230)**



BRD03

**DUALRAY AND LED
DISPLAY TRAFFIC
DETECTOR**



CAMP LOCK

**CAMP LOCK WITH KEY
FOR DC SERVO BARRIER
USE**



PLUG BOLT

**PLUG BOLT
(4 PCS PER SET)**



BG_U-BRACKET

**BASE MOUNTING
U-CHANNEL BRACKET**