

# EP.FR2006M

Entrypass Facial Recognition Terminal

Match, pass, and go



## A more intelligent access control through face recognition

EP.FR Face Recognition Reader series adopts the deep learning algorithm that thrives in accurate and fast facial recognition. The EP.FR series also supports multiple authentication modes :1:N Face Picture Match, Card authentication, etc.

The Facial Recognition Reader can be applied to various scenarios such as businesses, financial industries, corporate buildings, residential areas and other important areas.



## FEATURE HIGHLIGHT




- 4.3-inch LCD touch screen
- 2 Mega pixel wide angle-lens
- Recognition distance: 0.3 to 3 m
- Face recognition duration < 0.2 s/ User
- Face recognition accuracy rate  $\geq 99\%$
- Built- in Mifare card and DesFire card reading module (Presents card on the screen to authenticate)
- 6000 face capacity, 10,000 card capacity and 150,000 event capacity
- Face mask detection
- Supports ISAPI, ISUP 5.0, NetSDK protocol
- Configuration via the web client
- Two-way audio with indoor station and main station

## TECHNICAL SPECIFICATION

Model	EP.FR2006M
Operation system	Linux
Screen	4.3 Inch
Type	IPS Full Screen
Pixel	2MP
Lens	DUAL-Lens
Tone quality	Noise suppression and echo cancellation
Wired Network	Support 10 M/ 100 M/ 1000 M self-adaptive
<b>Interface</b>	
Network interface	1
Lock output	1
Exit button	1
Door contact input	1
Power interface	2-pin
<b>Capacity</b>	
Card capacity	10,000
Face capacity	6000
Event capacity	150,000
<b>Authentication</b>	
Face recognition accuracy rate	> 99%
Card type	Mifare card / DesFire card
Card reading frequency	13.56MHz
Face recognition duration	< 0.2 s per person
Face recognition distance	0.3 to 3 m
<b>Function</b>	
Time synchronization	Support
Face anti spoofing	Support
Audio prompt	Support
<b>General</b>	
Power supply method	12V/2A
Working temperature	- 10°c to 50°c (- 14°F to 122°F)
Working humidity	0 to 90% (no condensing)
Dimensions	118mm x 118mm x 20mm (4.6" x 4.6" x 0.7")
Application environment	Indoor
Installation	Surface, optional base stand
Language	English, Spanish (South America), Arabic, Thai, Indonesian, Russian, Vietnamese Portuguese (Brazil)

## Dimension

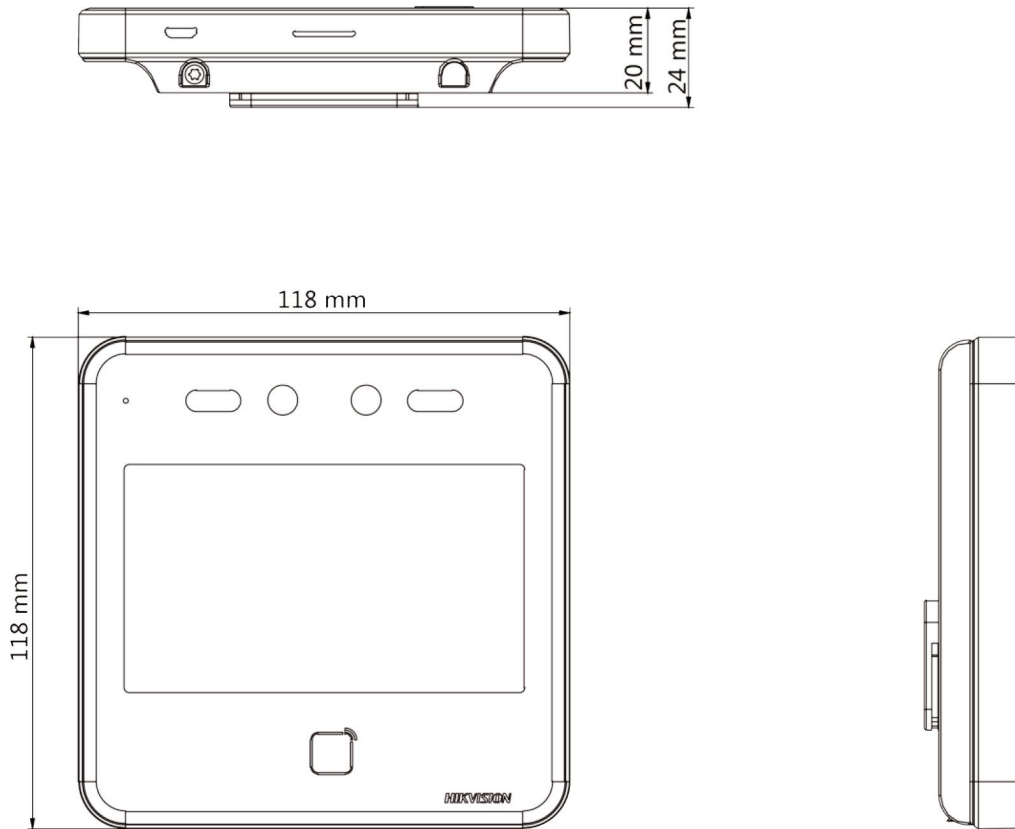

[www.entrypass.net](http://www.entrypass.net)

### Malaysia

No. 40, Jalan TPP 1/10, Taman Industri Puchong, Batu 12 Jalan Puchong, 47160 Puchong Selangor Darul Ehsan, Malaysia.  
Tel : +603 8068 1929  
Fax : +603 8062 6937  
Email : [info@entrypass.net](mailto:info@entrypass.net)

### Singapore

No. 1, UBI View, #03-03, Focus ONE Building, Singapore 408555.  
Tel : +65- 6841 7242  
Fax : +65- 6841 3937  
Email : [info@entrypass.net](mailto:info@entrypass.net)

### Indonesia

Jl. Raya Lodan No. 2, kompl. Ruko Lodan Centre Blok. P 10, Jakarta Utara 14430, Indonesia.  
Tel : +62 21 6983 3153  
Fax : +62 21 690 3005  
Email : [info@entrypass.net](mailto:info@entrypass.net)

A securityhub group company

