

*Automate and secure your entrance in style*



## Folding Arm Barrier Gate

*Model : BR600T\_90 series*



BR600T\_90 support 90° folding arm to accommodate low height ceiling such as basement parking and multi level parking. BR600T\_90 design is optimized to be highly affordable for commercial, residential and industrial application.

MAG intelligent barrier uses digital electronic motor counter to ensure that the arm opens and closes perfectly EVERY TIME. Built in optical sensor as redundant safety ensures arm never fail. Electronic parts is not subject to wear & tear and therefore is safer and maintenance free

Premium  
automation

### 1 BLUESPEED MOTOR

**BlueSpeed** motor uses lowest possible rotation speed (RPM) with our force rotation ratio technology to achieve high speed opening. This reduces mechanical wear and effectively eliminates any maintenance servicing on the motor.



### 2 DUAL SPRING PULL (DSP)

**DSP** Dual Spring mechanism to achieve two times smoother arm motion. Combination of different tension force reduced vibration as the arm stop. Well balanced arm weight reduces the possibility of broken spring thus reducing down time.



### 3 DUAL DETECTION SAFETY (DDS)

**DDS** uses dual sensor achieve double safety. Innovative design monitors current spike and motor rotation simultaneously to auto-reverse arm if blocked by obstacle. This is a important safety feature to prevent further damage in the event when arm hit car or pedestrian.



### 4 FULL SPARE PART LOCALLY


No more waiting 1 or 2 months to import parts from oversea. All original spare parts and repairing services are available from us locally that can make your barrier gate up and running in shortest time possible.



## TECHNICAL SPECIFICATION:

| Description            | Parameters               |
|------------------------|--------------------------|
| Mechanical temperature | - 40° to 75C             |
| Electrical temperature | -10° to 75C              |
| Power supply input     | 220V ± 10% AC, 50 / 60Hz |
| Power consumption      | 80 watt                  |
| Relative humidity      | < 90%                    |
| Opening speed          | 1.8 , 3 second           |
| Internal lubrication   | Grease                   |

## DIMENSION:

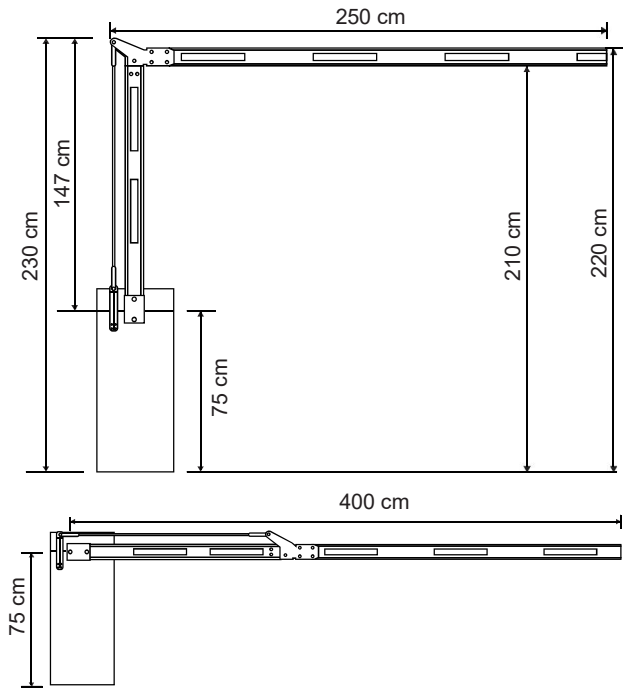

## ORDERING INFO:

| Model No   | Description       |
|------------|-------------------|
| BR618TR_90 | Arm on Right Side |
| BR618TL_90 | Arm on Left Side  |
| BR630TR_90 | Arm on Right Side |
| BR630TL_90 | Arm on Left Side  |

## ACCESSORIES:



Safety beam



Push Button

Authorized dealer

## Feature

### ARM SWING OUT

Arm will swing out when hit directly by vehicle (only BR618T & BR628T) to avoid further damage on the vehicle.



### EASY MANUAL RELEASE

MAG manual release clutch can be conveniently unlocked to manually open or close the arm without removing the whole top cover or body housing.



### ARM AUTO REVERSE

Built in smart collision detection technology allows arm to auto reverse when hit with an obstacle during closing to prevent further scratches & dents on the vehicle.




### MAINTENANCE FREE AC MOTOR

AC motor is strong and powerful, can easily lift up even with additional signage installed on to the barrier arm. AC motor is maintenance free, as there is no carbon in the AC motor.




### IMPROVED AIR VENTILATION

New fan design blow from top instead from sideways. This allowed cool air enter from top and exit from bottom to achieve more efficient cooling thus enabling BR600T series to support higher flow of traffic.



### IMPROVED NLSV2 DESIGN

NLS V2 is using magnet sensor instead of optical sensor. Optical sensor is subjected to interference from ambient light level. New NLS design removed all blind spot area to achieve perfect opening and closing consistently.



" Entrance is the first level of protection in building security. MAG offer complete gate automation system to secure your entrance.... "

