



RG-RAP1260 Reyee Wi-Fi 6 AX3000 Dual-Band Wall Plate Access Point

DATASHEET



/ Highlights

- Dual-radio performance, gigabit wireless wall-mounted AP
- Better experience with MU-MIMO under 802.11ax
- Multi-Color changable Cases
- Easy installation, worldwide compatible
- Capable of Reyee Mesh and 802.11K/V/R
- Powerful Standalone Portal via Ruijie Cloud



Highlight Features










Highlight Features

Smart AI Roaming Enhances Wireless Experience Anywhere You Go AP2 Ruijie Cloud WEB Roaming Way 1 Tradition Roaming B Smart AI Roaming

Cloud, Make Your Business Easy

Self-organizing network
 Cloud portal authentication
 Remote monitoring and maintenance
 Upgrade firmware via Cloud
 APP library dynamically update

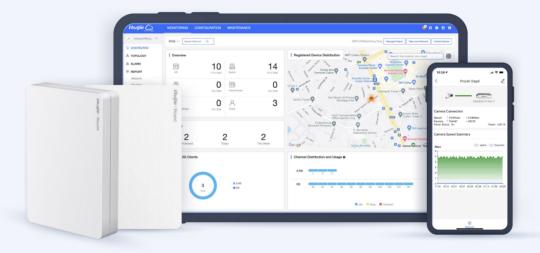



Specifications

| | Basic Features |
|-----------------------------------|---|
| Wi-Fi Standards | 802.11a/n/ac/ax 802.11b/g/n/ax |
| MIMO | 2.4 GHz, 2x2, MU-MIMO 5 GHz, 2x2, MU-MIMO |
| Max. Wi-Fi Speed | 2.4 GHz: 574 Mbps 5 GHz: 2402 Mbps |
| Number of Antennas | 5 |
| Antenna Type | Built-in omnidirectional antennas |
| Antenna Gain | 2.4 GHz: 3 dBi 5 GHz: 5 dBi |
| Transmit Power | Frequency bands using and the max EIRP: Note: Country specific restrictions apply European Union & United Kingdom 2400-2483.5 MHz, EIRP≤ 20 dBm 5150-5350 MHz, EIRP≤ 33 dBm 5470-5725 MHz, EIRP≤ 30 dBm United States: 2400-2483.5 MHz, max output power≤30dBm & EIRP≤36 dBm 5150-5250 MHz, max output power≤30dBm & EIRP≤36 dBm 5250-5350 MHz, max output power<24dBm & EIRP≤30 dBm 5470-5725 MHz, max output power<24dBm & EIRP≤30 dBm 5725-5825 MHz, max output power≤30dBm & EIRP≤36 dBm Myanmar: 2400-2483.5 MHz, EIRP≤23 dBm 5725-5825 MHz, EIRP≤30 dBm Thailand: 2400-2483.5 MHz, EIRP≤20 dBm 5150-5350 MHz, EIRP≤30 dBm Indonesia: 2400-2483.5 MHz, EIRP≤27 dBm 5150-5350 MHz, EIRP≤23 dBm 5725-5825 MHz, EIRP≤23 dBm 5725-5825 MHz, EIRP≤23 dBm 5725-5825 MHz, EIRP≤23 dBm 5725-5825 MHz, EIRP≤23 dBm 5150-5350 MHz, EIRP≤23 dBm 5725-5825 MHz, EIRP≤23 dBm 5725-5825 MHz, EIRP≤23 dBm |
| Fixed Ports | 1 x 10/100/1000Base-T Ethernet uplink port 4 x 10/100/1000Base-T Ethernet downlink ports 1 x Reset hole |
| Max. Number of Concurrent STAs | 512 |



Specifications

| | Software Features | |
|--|--|--|
| Recommended Number of Concurrent STAs | 110 | |
| Max. Number of SSIDs | 8 | |
| Supported Frequency Bands | 802.11b/g/n/ax: 2.400 GHz to 2.483 GHz 802.11a/n/ac/ax: 5.150 GHz to 5.350 GHz, 5.470 GHz to 5.725 GHz, 5.725 GHz to 5.850 GHz (country-specific restrictions apply) | |
| | WLAN Basic Features | |
| Power Adjustment | ✓ | |
| Channel Bandwidth | 2.4 GHz: Auto/20 MHz/40 MHz 5 GHz: Auto/20 MHz/40 MHz/80 MHz/160 MHz | |
| Roaming | Layer 2 roaming Layer 3 roaming 802.11k/v/r roaming | |
| OFDMA | ✓ | |
| Beamforming | ✓ | |
| Target Wake Time (TWT)* | ✓ | |
| Wi-Fi Multimedia (WMM)) | ✓ | |
| Radar Signal Detection and Frequency Hopping (DFS) | ✓ | |
| WLAN Security | | |
| Wi-Fi Password | 16 characters | |
| Security Mode | WAP-PSK,WAP2-PSK,WPA-WAP2-PSK | |
| Blocklist and Allowlist | ✓ | |
| Enhanced User Experience | | |
| Wi-Fi Optimization | ✓ | |
| STA Limiting | ✓ | |
| Removing Low-RSSI STAs | ✓ | |
| Removing Low-RSSI STAs | ✓ | |
| Syslog Recording Why Users Lose Connection | ✓ | |



Specifications

| | System | |
|---|---|--|
| Auto Channel and Power Adjustment on Cloud | ✓ | |
| RSSI Threshold for STA Access | ~ | |
| Load Balancing | ✓ | |
| Networks | | |
| Network Access Mode | PPPoE Client DHCP Client Static IP | |
| Avoidance of WAN IP Address Conflicts | ~ | |
| VLAN | Port-based VLAN VLAN over 802.1Q TV projection screen | |
| DHCP Server | ~ | |
| Cloud Management | ✓ | |
| App Management | ✓ | |
| App Upgrade | ✓ | |
| App Restart | ✓ | |
| Scheduled Restart | ✓ | |
| Default Access/Password | 10.44.77.254 The factory status password: admin | |
| Local Upgrade | ✓ | |
| Online Upgrade | ✓ | |
| Backup | ✓ | |
| Factory Reset | ✓ | |
| Language | Chinese English | |
| System Log | ✓ | |
| Diagnostics | ~ | |
| Network Check | ✓ | |



/ Specifications

| | Hardware Features |
|--|--|
| LED | 1 x System status LED |
| Reset Hole | 1 x Reset hole |
| Dimensions (W x D x H) | 124 mm x 86 mm x 24 mm (4.88 in. x 3.89 in. x 0.94 in.) |
| Weight | 0.5 kg (1.10 lbs) |
| Installation Method | In-wall mounting |
| Mounting Bracket Dimensions (W x D x H) | 122 mm x 80 mm x 3.8 mm (4.80 in. x 3.15 in. x 0.15 in.) |
| Mounting Hole Pattern | Hole pattern 83.5 mm x 60 mm (3.29 in. x 2.36 in.) |
| Mounting Hole Diameter | 2.25 mm (0.09 in.) |
| Pole Diameter | N/A |
| Power Supply | IEEE 802.3af/at PoE |
| Max. Power Consumption | 12 W |
| PoE Power Budget | N/A |
| | Environment |
| Operating Temperature | 0°C to 40°C (32°F to 104°F) |
| Storage Temperature | -40°C to +70°C (-40°F to +158°F) |
| Operating Humidity | 5% to 95% RH (non-condensing) |
| Storage Humidity | 5% to 95% RH (non-condensing) |
| Ingress Protection Rating (IP Rating) | IP41 |
| Surge Protection | +/-4kV |
| MTBF | 400,000 hours |



Package Contents

| Package Information | RG-RAP1260 |
|-------------------------|------------|
| RG-RAP1260 Access Point | 1 |
| Power Adapter | N/A |
| User Manual | 1 |
| Cat5e UTP Cable | N/A |
| Mounting Bracket | 1 |
| Rack-mount Bracket | N/A |
| Screw | 4 |
| Certification | CE and CB |
| Warranty Card | 1 |



Redefine your easy network

Copyright ©2000-2023 Ruijie Networks Co., Ltd. All rights reserved.

No part of this document may be reproduced or transmitted in any form or any means without prior written consent of Ruijie Networks Co., Ltd.

Notice

This content is applicable only to regions outside the China mainland. Ruijie Networks Co., Ltd. reserves the right to interpret this content.

The information contained herein is subject to change without notice. Nothing herein should be construed as constituting an additional warranty. Ruijie Networks Co., Ltd. shall not be liable for technical or editorial errors or omissions contained herein.



Ruijie Networks Co., Ltd.
Building 19, Juyuanzhou Industrial Park, No.618 Jinshan
Road, Cangshan District, Fuzhou, Fujian, China
Website: https://www.ruijienetworks.com